

15300

FluidGard® 160 Procedure Mask


- Complies with ASTM F2100 Level 3 Requirements
- Specially designed inner facing improves comfort
- Integrated layers work together to maximize breathability
- Soft comfortable earloops provide easier donning



Specifications

Product	FluidGard® 160 Procedure Mask
Color	Blue Diamond
Fluid Resistance	160mm Hg
Filtration - BFE	≥99.8
Filtration - PFE	≥99
Delta P	≤3.2
Flammability	Class 1
Attachment Design	Earloop
Mask Construction	Sonic Welded
Packaging	50/Box, 10/Boxes, 500/Cs

This product is NOT made with natural rubber latex

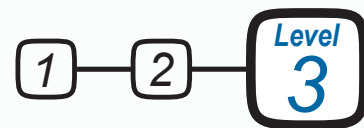

Complies with ASTM F2100

Fluid Resistance (mmHg):	160
BFE (%) @ 3.0 µm:	≥ 98%
PFE (%) @ 0.1 µm:	≥ 98%
ΔP (mm H₂O/cm²):	< 5
Flame Spread:	Class 1